

TECHNICAL FEATURES LALO |





LALO

Executive and working chairs for offices.

DIMENSIONS

	LALO	LALO- HIGH HEADEREST
Height	1100 mm	1280 mm
Seat Height	400-500 mm	400-500 mm
Width	500 mm	500 mm
Depth	460 mm	460 mm
Peso	18kg	22 Kg

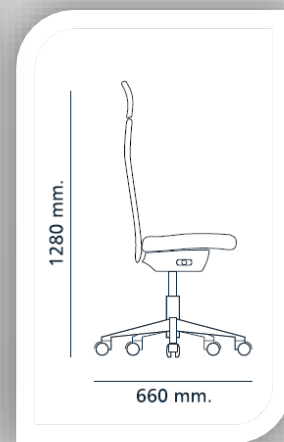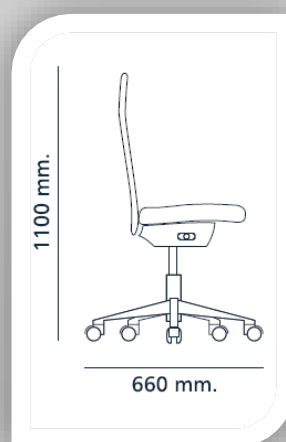

DESCRIPTION

Backrest

Ergonomic backrest with height adjustment. Steel structure covered with high-density foam.

Seat

Injected plastic support with anatomical shapes covered with high-density foam and depth adjustment.

Base

660 mm polyamide or polished aluminium base.

Arms

Several versions of adjustable arms in height and depth.

Fixed armrest finished in white, black, grey or chrome

Type-6. Adjustable in height.

Type-3. 3D Adjustable in height, width, depth and rotation.

Type-4. 4D Adjustable in height, width, depth and 360° rotation. Aluminium framework.

Upholstery

High quality upholstery and mesh standards. See sample-book.

Wheels

65 mm soft band wheels or static glides.

Mechanism


Synchro mechanism with five stops plus depth system in the seat and anti-shock system.




Upholstered back with headrest



Upholstered back

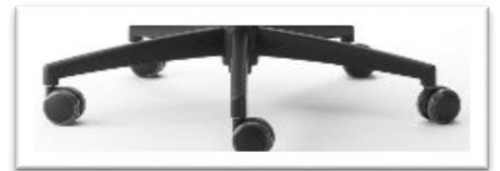

Polyamide

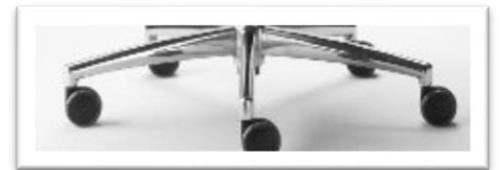

Aluminium



Type 6



Type 3



Type 1



Type 4

STANDARDS

The chair “LALO” satisfactorily fulfils the following standards and regulations:

UNE EN 1335-1: 01 6. Dimensions. Detemination of dimensions

UNE EN 1335-2: 09 4. Safety Requirements

UNE EN 1335-2: 09 5. User information

UNE EN 1335-3: 09 7.1. Stability

UNE EN 1335-3: 09 7.2.1. Seat front edge static load test

UNE EN 1335-3: 09 7.2.2 Seat and backrest combined static load test

UNE EN 1335-3: 09 7.2.3. Armrest vertical static load – center point

UNE EN 1335-3: 09 7.3.1. Seat and backrest durability

UNE EN 1335-3: 09 7.3.2. Armrest – fatigue testing

UNE EN 1335-3: 09 7.3.5. Castor and chair base durability

UNE EN 1335-3: 09 7.4. Rolling Resistance